

9th Eastern European Young Water Professionals Conference





CONFERENCE PROCEEDINGS

Uniting Europe for Clean Water:

Cross-Border Cooperation of Old, New and Candidate Countries of EU,
for identifying problems, finding causes and solutions

24-27 May 2017 Budapest, Hungary

<http://iwa-ywp.eu/>

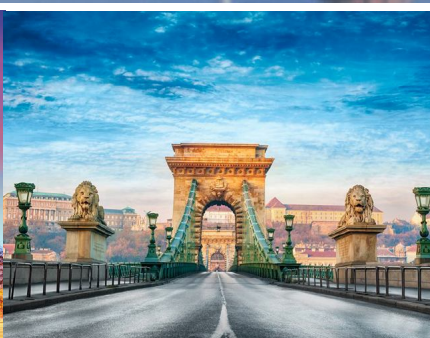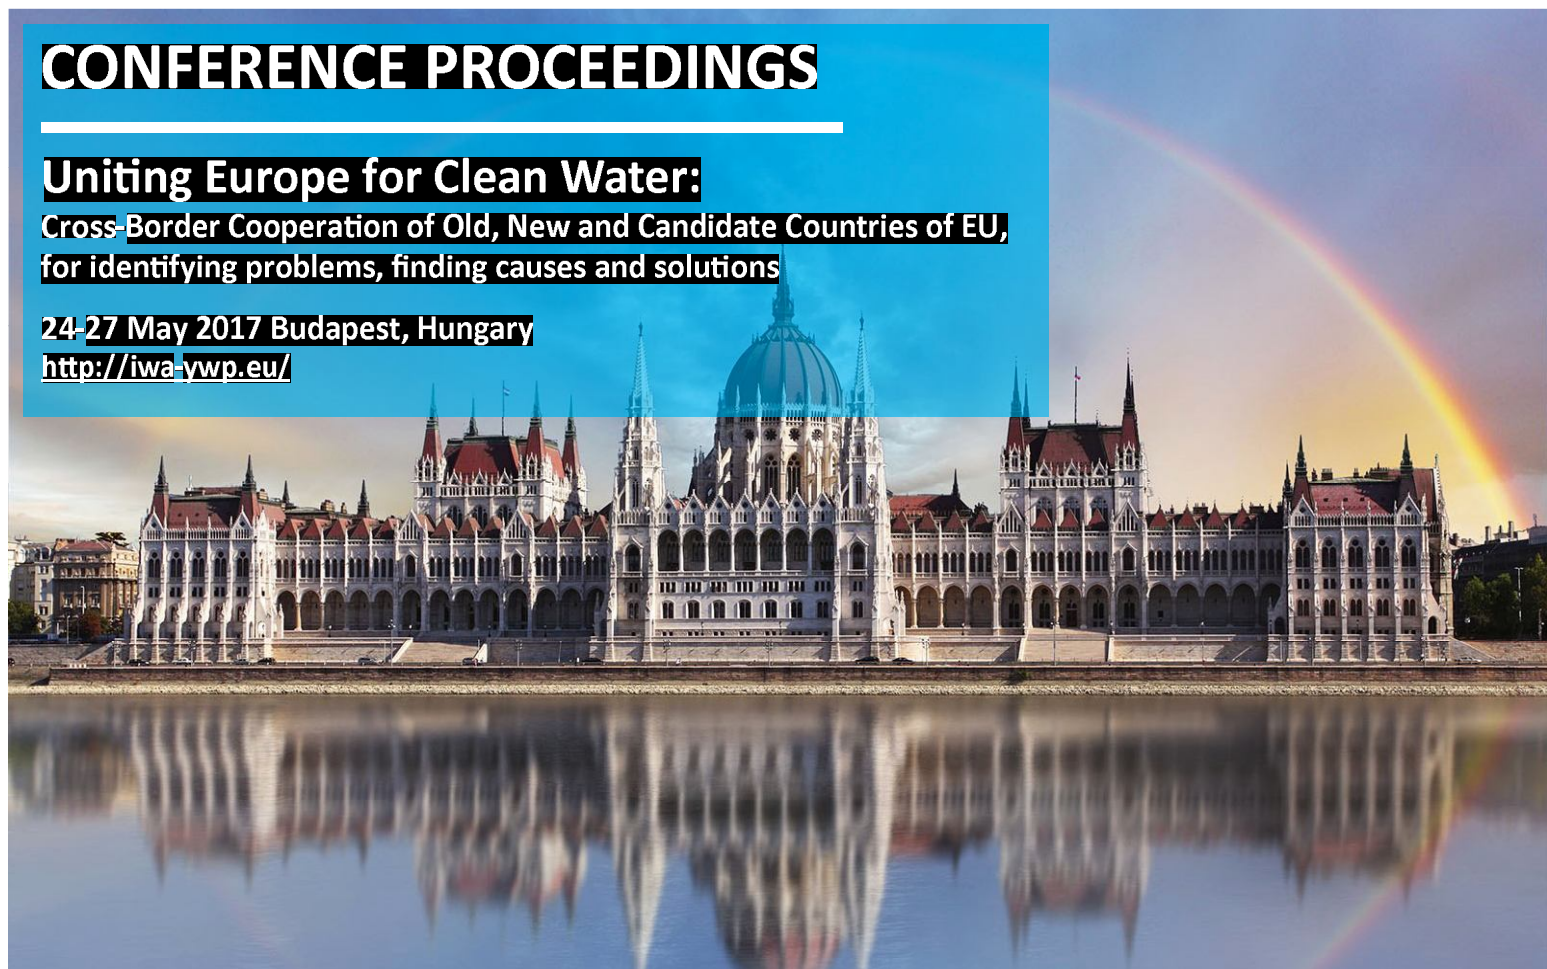

Organised by:



Co-organised by:



Hungarian Water Utility Association



Hungarian Water Association



Hungarian Water Cluster



Budapest Waterworks



Szent István University



SAPIENTIA Hungarian
University of Transylvania



University of Pécs



University of Pannonia

9th Eastern European Young Water Professionals Conference



CONFERENCE PROCEEDINGS

Uniting Europe for Clean Water:
Cross-Border Cooperation of Old, New and Candidate Countries of EU
for identifying problems, finding causes and solutions

24-27 May 2017, Budapest, Hungary

Editors:

Maryna Feierabend

Olha Novytska

Vince Bakos

Typesetting:

Maria Danilycheva

Maja Djogo

Éva Zofia Sebestyén

Cover Design:

Maryna Feierabend

Budapest 2017

GOLD SPONSORS



INTERNATIONAL PROGRAMME COMMITTEE

Chair: Prof. Jobbágy A. (Budapest University of Technology and Economics, Hungary)

Co-Chair: Dr. Trifunovic N. (UNESCO IHE, NL/Serbia)

Committee members:

Prof. Józsa J. (Budapest University of Technology and Economics, Hungary)
 Prof. Wanner J. (Prague Institute of Chemical Technology, Czech Republic)
 Dr. Takács I. (Dynamita, France)
 Dr. Patziger M. (BME Department of Sanitary and Environmental Engineering, Hungary)
 Mr. Foerster G. (Metito China Holdings, China)
 Dr. Vasyukova E. (WTE, Germany)
 Prof. Makinia J. (Gdansk University of Technology, Poland)
 Dr. Wójtowicz P. (Wrocław University of Technology, Poland)
 Dr. Bumbac C. (ECOIND, Romania)
 Dr. Szlachta M. (Wrocław University of Technology, Poland)
 Dr. Ahmet Çelebi (Sakarya University, Turkey)
 Prof. Fernandez Morales F. J. (UCLM, Spain)
 Dr. Iliescu F. (Romania)
 Dr. Langergraber G. (BOKU Wien, Austria)
 Dr. Rieger L. (InCtrl Solutions, Canada)
 Dr. Plósz B. G. (DTU, Denmark)
 Dr. Drewnowski J. (Gdansk University of Technology, Poland)
 Dr. Langone M. (University of Trento, Italy)
 Prof. Vaseashta A. (International Clean Water Institute, USA)

LOCAL PROGRAMME COMMITTEE

Committee members:

Dr. Tardy G. (BME Department of Applied Biotechnology, Hungary)
 Homola A. (Bácsvíz, Hungary)
 Csörnyei G. (Budapest Waterworks, Hungary)
 Dr. Laky D. (BME Department of Sanitary and Environmental Engineering, Hungary)
 Dr. Clement A. (BME Department of Sanitary and Environmental Engineering, Hungary)
 Dr. Kardos L. (Szent István University, Faculty of Horticultural Science, Hungary)
 Dr. Honti M. (MTA-BME Water Research Group, Hungarian Academy of Sciences, Hungary)
 Dr. Dittrich E. (University of Pécs, Hungary)
 Dr. Nemestothy N. (University of Pannonia, Hungary)
 Ms. Makó M. (Budapest Sewage Works)
 Dr. Anikó Brumbauer (Budapest Waterworks)

INTERNATIONAL ORGANISING COMMITTEE

Chair: Dr. Feierabend M. (IWA YWP, Belgium)

Co-Chair: Dr. Bakos V. (Budapest University of Technology and Economics, Hungary)

Committee members:

Ibrahimllari A. (IWA YWP Program, Albania)

Dr. Loderer C. (Kompetenzzentrum Wasser Berlin, Germany)

Sebestyén É. (Budapest Waterworks, Hungary)

Dr. Rudic Z. (Institute for the Development of Water Resources "Jaroslav Cerni", Serbia)

Dr. Tiron O. (ECOIND, Romania)

Dr. Novytska O. (The National University of Water and Environmental Engineering, Ukraine)

Sabic M. (University of Zagreb, Croatia)

Dr. Avşar E. (Bitlis Eren University, Turkey)

Steinbacher K. (Federal Ministry of Agriculture, Forestry, Environment and Water Management, Austria)

Dr. Djogo M. (University of Novi Sad, Serbia)

Dejus S. (Riga Technical University, Latvia)

Lavrnjic S. (University of Cadiz, Spain/Serbia)

Tsanov E. (University of Architecture, Civil Engineering & Geodesy, Bulgaria)

Danilycheva M. (Moscow State University of Civil Engineering, Russia)

Ciepliński J. (Cracow University of Technology, Poland)

LOCAL ORGANISING COMMITTEE

Committee members:

Kiss A. (Hungarian Water Utility Association, Hungary)

Varga E. (Dynamita, Hungary)

Weinpel T. (Transdanubian Regional Waterworks/ BME Department of Applied Biotechnology, Hungary)

Vánkos Z. (Organica, Hungary)

Madarász E. (BME Dept. Sanitary and Environmental Engineering, Hungary)

Kiss K. (Budapest Sewage Works/ BME Dept. Sanitary and Environmental Engineering, Hungary)

Lóránt B. (BME Dept. Applied Biotechnology, Hungary)

Lóka M. (BME Dept. Applied Biotechnology, Hungary)

Lemaire B. (Budapest Waterworks, Hungary)

Deák A. (Budapest Waterworks, Hungary)

Kassai Z. (Budapest Sewage Works, Hungary)

Boér M. (Allied Water Solutions, Hungary)

Sinka A. (Hungarian Water Association, Hungary)

CONTENTS

WATER MANAGEMENT

Avsar E., Deniz Avsar D., Toröz İ.

Seasonal Determination and Investigation of Disinfection by Product Formation Potentials (DBPFPs) of Surface Waters, İstanbul Ömerli and Büyükçekmece Case Study

12

Çelebi A., İkizoğlu Z.R., Adar B.B., Karaarslan Y.

Quantitative Nitrogen Forms in a Wetland along with Critical Points of Restoration

20

Choi H.S., Geronimo F.K.F., Kim L.H.

Implications of CaCl₂ Application to Plants in LID Facility

26

Ćosić M., Jovanović I., Stričević R., Dželetović Ž., Pavlović M., Bogdan I., Djurović N.

Stand Density Impact on Soil Moisture Dynamics and Water Stress of *Miscanthus × giganteus* Greef et Deu

34

Čučak D.I., Nagyapati S., Radnović D.V.

Assessment of Ecological Potential of Accumulation Zobnatica in Serbia According to Biological and Physico-chemical Parameters

39

Cuceloglu G., Ozturk I.

Development of a Modelling Framework for Sustainable Water Management Practices: Case Study for the Megacity Istanbul

47

Cvijanović N., Antonić V.

Flood Risk Mapping in the Resava River Valley

55

Dede O.H., Sakar N., Sakar E.B., Ozdemir S.

Investigation on the Effects of Bluefin Tuna (*Thunnus Thynnus* L.) Cultivation Facilities on Aquatic Environment

63

Dittrich E., Salamon-Albert É., Somfai D., Dolgos-Kovács A. and Kiss T.

The Transpiration Effect of Horizontal Subsurface Flow Constructed Wetlands

69

Garip E., Yavas O., Yavas O.

Evaluation of the Impact of Environmental Problems on the Lake Ecosystem: Bursa-Uluabat Lake

76

Gavuliaková B., Remešicová E.

Groundwater Quality Changes in a Groundwater Body in a Poor Chemical State

83

Di Giacomo T.V. An Innovative Methodology to Prevent Impacts Due to Run-off and to Control Land Use Changes	91
González G.P. Modelling and Analysing the Urban Dynamics of the Wetlands in Bogotá (Colombia) under a <i>Green Growth</i> Approach	99
Halych O. Calculations of Undular Jump's Main Depths	107
Ivetic D., Prodanovic D., Cvitkovac M. Improvement of EM Flow Meter's Accuracy through Site-Specific CFD Calibration – Case Study HPS Trebinje	113
Kardos M. K., Koncsos L. Processing Statistical Parameters of a Settling Substance along a River Network	121
Lekic J., Rudic Z., Nikolic G., Bozic M., Vujovic B., Raicevic V. Mutual Influence of Irrigated Agriculture and Environment in Serbia	130
Ljubičić R., Zindović B., Stanić V., Savić Lj. Spillway Design Optimization for Embankment Dams Using Genetic Algorithms	138
Obrovski B., Bajić J., Mihajlović I., Novaković M., Vojinović Miloradov M., Batinić B., Adamović D., Rajs V. Determination of Nitrite in Surface Water by Colour Fiber Optic Sensor	146
Oz N., Ozkan E. Water Quality Analysis of the River Basin Based on Macroinvertebrates Indices	151
Ozdemir S., Bal I., Celebi Y., Kurtulmuş Y., Ozer H. Relationship between Stream Water Quality and Land Cover; Case Study of Lake Sapanca Watershed	157
Silva D.B., Silva T.B.S.C., Monteiro L.R., Faustino M.G., Marques J.R., Stellato T.B., Soares S.M.V., Pires M.A.F., Cotrim M.E.B. Guarapiranga Dam (São Paulo-SP/Brazil) Nitrogen Distribution	164
Todorović A., Plavšić J. Climate Change Impact on Extreme Hydrologic Events in Serbia	171
Vu D.T., Yamada T., Ishidaira H. Assessing the Impact of Sea Level Rise due to Climate Change on Seawater Intrusion in Mekong Delta, Vietnam	179

WATER SUPPLY AND WATER TREATMENT

Alsohaimi I. H., Abdalla M. A., Khan M. R., Aldaadi S. S., Alqadami A. A. Study of Bromate Formation during Water Disinfection in the Presence of Bromide	187
Anggraini A.K., Silva A., Fuchs S. Removal Mechanism in Slow Sand Filtration: Effect of Sand Grain Size Distribution on Suspended Solids Penetration	195
Badowska E., Karolak Z. The Presentation of Possibility of Water Supply System Modernization for Zgierz, Located in Poland, by Means of EPANET Software	203
Benecke J., Baur F., Haas M., Ernst M. Investigation of Surficial Gypsum Scaling During Reverse Osmosis Desalination by Real-time Membrane Surface Imaging	211
Dalecka B., Mezule L., Juhna T. Study of Potential PCR Inhibitors in Drinking Water from Riga Distribution System	220
Dejus S., Nescerecka A., Kurcalts G., Juhna T. Detection of Drinking Water Contamination Event with Mahalanobis Distance Method, Using On-line Monitoring Sensors and Manual Measurements Data	226
Devecseri M., Molognoni D., Cecconet D., Capodaglio A.G. Design and Start-up of a Bioelectrochemical System for Groundwater Denitrification	234
Gönczi G. Unconventional Methods for Pressure Loss Reduction in Standard Pipe Elements	242
Gromov G. The Application of Genetic Algorithms for Algorithmized Calibration of the Hydraulic Models of Water Supply Systems	248
Grzegorzek M., Majewska-Nowak K. The Defluoridation Process in the Presence of Mineral Salt and Organic Matter with the Use of Batch Electrodialysis	258
Kutyłowska M. Forecasting Failure Rate of Water Conduits in One Selected Zone	266
Lončarski M., Agbaba J., Tubić A., Watson M., Kragulj Isakovski M., Maletić S., Rončević S. Investigation into the Impact of Various Factors on the Removal of Pentachlorobenzene from Water by Anion Exchange Process	274

Milašinović M., Prodanović D., Stanić M.	
Water Distribution Network Topology Validation Using Pressure Drop Test	282
Nigiz F. U., Nilmioglu N. D.	
An Alternative Method for Fresh Water Supplying: Pervaporative Desalination of Sea-Water Using Polyvinylidene Fluoride Based Membrane	290
Novara D., Derakhshan Sh., McNabola A., Ramos H. M.	
Estimation of Unit Cost and Maximum Efficiency for Pumps as Turbines	299
Odud L., Kovalchuk V.	
Water Softening Using Liming on Expanded Polysterene Filters with Increasing Layer of Suspended Sediment	306
Öz N., Tanas E.N., Çelebi A.	
Effectiveness of Chlorination on Coliform Bacteria in the Rural Area Drinking Water	312
Ozkul S., Yuksel R., Unalan H.E., Dursun D.	
Selective Removal of Monovalent and Divalent Ions via Capacitive Deionization Process	318
Pervov A. G., Andrianov A. P., Danilycheva M. N.	
Evaluation of Inhibition Efficiency of “Green” Antiscalants and Scale Morphology on Reverse Osmosis Membranes	325
Schulz M., Pohl D., Ernst M.	
Predicting NOM Removal during Drinking Water Treatment by Combined In-Line Coagulation/Ultrafiltration	333
Wolf M., Traczewska T.M., Grzebyk T.	
Comparability Biofilm Structure on ITO Sensor with Forms Generated on Technical Materials	342

SEWAGE MANAGEMENT AND TREATMENT

Al-Hazmi H., Majtacz J., Kowal P., Feng Y., Mąkinia J.	
A Comparison of the Efficiency of Deammonification under Different Aeration Strategies in a Laboratory-Scale Sequencing Batch Reactor	351
Al-Zreiqat I., Barjenbruch M.	
Energy Benchmark for the Wastewater Treatment Plants in Jordan	359
Arslan G., Soyer E.	
Ammonium Ion Exchange in Fluidized Bed Reactors: Effects of Expansion Ratio & Layer Composition	367

Bakos V., Hári M.F., Nagy E., Jobbágy A. Application of Float-seal and Smart Sampling Strategy for Advanced Carbon Source and Chemical Management in Activated Sludge Nutrient Removal	375
Beszédes S., Kertész Sz., Lemmer B., Kovács I., Keszthelyi-Szabó G., Hodúr C. Dielectric Constant Measurement in Wastewater Treatment Processes	382
Carboneras M.B., Villaseñor J., Fernández-Morales F.J. Combination of Biological and Electrochemical Processes to Remove Oxyfluorfen Pesticide from Water	390
Ciepliński J., Rybicki S.M. The Energy Efficiency of the BOD ₅ Removal by a Small SBR Wastewater Treatment Plant in 2016	397
Csizmadia P., Till S. Numerical Investigation of Loss Coefficient of Elbow in the Case of Non-Newtonian Sludge	404
Damar Arifoglu Y., Solak Z. Reuse of Urban Qualified Refined Wastewater in the Small City	410
Doskocz N., Muszyński A. and Załęska-Radziwiłł M. High Microdiversity and Dynamics of <i>Accumulibacter</i> in Full-scale Wastewater Treatment Plants Indicate the Necessity to Reveal the Hidden Part of Its Population	418
Gazsó Z., Házi F., Kenyeres I., Váci L. Full-Scale Wastewater Treatment Plant Simulation for Real-Time Optimization	426
Herrmann-Heber R., Sommer A.-E., Reinecke S., Mohseni E., Hampel U. Effects of Baffles on Bubble Rising Behaviour – Extending Bubble Residence Time and Mass Transfer	433
Kiss B., Bakos V., Jobbágy A. Utilization of Glycogen Accumulating Organisms for Enhanced Biological Carbon Removal in Activated Sludge Systems	441
Kiss K., Patziger M. Full Scale Investigation of Hydrodynamic and Denitrification Processes in an Anoxic Tank	448
Madarász E., Patziger M. Computational Fluid Dynamics (CFD) Analysis of Aerated Grit Chambers	456
Mateo S., Cañizares P., Rodrigo M.A., Fernández-Morales F.J. Performance of Carbonaceous Anodic Material in Air-Breathing MFCs	461

Mohseni E., Herrmann-Heber R., Reinecke S., Hampel U. Bubble Generation by Solid Membrane Spargers for Activated Sludge Wastewater Treatment Application	468
Obradović D. Natural Wastewater Treatment: Land Treatment Systems	476
Romashko A. A Way of Reaching Energy Self-Sufficiency of Wastewater Treatment Plants in Ukraine	483
Rossi S., Scaglione D., Bellucci M., Mezzanotte V., Ficara E. Assessing the Activity of a Microalgae-Bacteria Consortium for Wastewater Treatment through Respirometry	488
Rossinskyi V., Sablii L. Effect of Surfactants on Biological Phosphorus Removal from Municipal Wastewater	496
Sabaghian M., Mehrnia M. R., Esmaeili M., Noormohammadi D., Sharafi A.H. Formation and Performance of Dynamic Membrane in Membrane Bioreactor (MBR) for Wastewater Treatment	502
Sharafi A.H., Mehrnia M.R., Tavakoli O., Shamskilani M. The Effects of Amoxicillin on Removal Efficiency of Organic Matter and Nutrients in Membrane Bio-Reactor	510
Tardy G.M., Lóránt B., Lóka M., Nagy B., László K. Enhancing Biodegradation and Power Production of a Microbial Fuel Cell with Nitrogen Doped Carbon Aerogel as Cathode Catalyst	517
Wartalska K., Nowakowska M., Kaźmierczak B. Verification of Storm Water Reservoirs Operation in Hydrodynamic Modeling	526
Weinpel T., Jobbágy A. Low-S - Low-DO Conditions in the Non-Aerated Reactors of Szeged Wastewater Treatment Plant	534
Wisniewski K., Di Biase A., Oleszkiewicz J.A., Makinia J. Start-up of the Anammox Process with Low Concentrations of Suspended Biomass in a Membrane Bioreactor: Experimental and Modelling Results	541
Xu L., Zhao Y., Fan Ch., Fan Zh., Zhao F. Exploring Constructed Wetland-Microbial Fuel Cell (CW-MFC) as COD Removal Indicator in Treatment Wetland	549

Yavas O., Erol Nalbur B. 553

Comparing the Energy Efficiency of On-Site Wastewater Treatment Plants and Municipal Activated Sludge Systems Plants for Municipal Wastewater

INDUSTRIAL WASTEWATER TREATMENT AND OTHER TOPICS

Andjelic L., Petkovic S., Pavlovic M., Vlajic D., Simovic I. 559
Alternative Solution of Water Treatment from Mine Lece, Medvedja, Serbia

Aydin S., Yesil H., Tugtas A.E. 565
Volatile Fatty Acid Recovery from Anaerobically Fermented Organic Wastes

Bezanovic V., Sremacki M., Novaković M., Strbac D., Đogo M., Mihajlovic I. 573
Identification of Organic Pollutants in Leachate of MSW Landfill Sites in AP Vojvodina, Serbia

Boonyungyuen W., Wonglertarak W., Wichitsathian B. 579
Degradation of Refractory Textile Wastewater Containing Azo Dye by Fenton's Reagent

Dlangamandla C., Ntwampe S.K.O., Basitere M. 585
A Bioflocculant Supported Dissolved Air Flotation System for the Removal of Suspended Solids, Lipids and Protein Matter from Poultry Slaughterhouse Wastewater

Hajiali A., Pirumyan G.P., Ja`fari M., Sara Hassan S. 593
Evaluation of NH_4^+ and PO_4^{3-} Removal in Treatment of an Industrial Wastewater Containing Chlorophenolic Contaminants with Ozonation

Kertész Sz., Bor P., Beszédes S., Hodúr C. 599
Single and Multi-Stage Membrane Separation for Dairy Wastewater Purification

Kovács I., Veréb G., Kertész Sz., Beszédes S., Hodúr C., László Zs. 607
Investigation of Surface and Filtration Properties of TiO_2 Coated Ultrafiltration Polyacrylonitrile Membranes

Mook W.T., Aroua M.K., Szlachta M., Lee C.S. 615
Combined Adsorption and Electrocoagulation Process for the Removal of Reactive Black 5 Dye from an Aqueous Solution

Nakic D., Vouk D., Serdar M., Šiljeg M. 626
Technical and Environmental Study of Sewage Sludge Ash Utilization in Concrete Industry

Novakovic M., Bezanovic V., Strbac D., Ivetic T., Djogo M. , Strbac G., Mihajlovic I.	
Degradation of Non-Steroidal Anti-Inflammatory Drug- Naproxen from Aqueous Solution by Photocatalysis with Nanopowder Mixtures	634
Ozkan Z.Y., Cakirgoz M., Kaymak E.S., Erdim E.	
Rapid Decolorization of Textile Wastewater by Green Synthesized Iron Nanoparticles	639
Rápó E., Tonk Sz., Keresztes R., Szép R., Majdik C.	
Textile Dye Removal from Aqueous Solutions by Eco-Friendly Technology	647
Toth A.J., Haaz E., Manczinger J., Mizsey P.	
Novel Method for Reuse of Process Wastewater Based on Distillation	655
Toth A.J. , Haaz E., Nagy T., Matyasi J., Balla J., Mizsey P.	
Treatment for COD Reduction of Process Wastewater: Washing Material Removal with Physicochemical Tools	662
Unlu D., Hilmioglu N.	
Development of Functionalized Chitosan Membrane for Adsorptive Separation of Acetic Acid from Dilute Aqueous Solutions	667
Unlu D., Hilmioglu N.	
Pervaporative Dehydration of Water/Ethanol Mixtures Using Chitosan Membranes Crosslinked with Sulfosuccinic Acid	674
Veréb G., Bozóki R., Kovács I., Kertész Sz., Hodúr C., László Zs.	
Effects of Photo-Fenton Pre-Treatment of Crude Oil Contaminated Water on Membrane Microfiltration	682
Widyaningrum D. S., Priadi C. R.	
Effect of Using Aquaponic System and Additional Clarifier in Maintaining Inorganic Nitrogen and TSS Concentration on Tilapia Fish Aquaculture Wastewater	690
Wirikithkul P., Junpirom S., Yimrattanabovorn J.	
Adsorption of Methylene Blue Dye from Aqueous Solution by Activated Carbon Prepared from <i>Melaleuca cajuputi</i> Powell Charcoal using Heating Activation	698
Wonglertarak W., Boonyungyuen W., Wichitsathian B.	
Degradation of Textile Wastewater Containing Azo Dye by Hybrid Membrane Bioreactor (HMBR)	705
Yermakovych I., Kochetov G., Samoilenko N., Mårtensson L.	
Wastewater Treatment of Hospitals from Pharmaceutical and Bacterial Contaminants	710

Dielectric Constant Measurement in Wastewater Treatment Processes

S. Beszédes, Sz. Kertész, B. Lemmer, I. Kovács, G. Keszthelyi-Szabó and C. Hodúr*

* Department of Process Engineering, Faculty of Engineering, University of Szeged, H-6725 Szeged, Moszkvai krt. 9., Hungary (E-mail: beszedes@mk.u-szeged.hu)

Abstract

Numerous studies have been published in the last years investigating the applicability of the microwave pre-treatments in wastewater and mainly in sludge utilization technologies. It has been verified that microwave irradiation, as pre-treatment method, could be advantageous if organic matter fraction is utilized in further biological processes. Because of the change of compounds and the physicochemical structure of organic matter fraction, the dielectric parameters can be changed during the pre-treatment process. Because there are very few data available related to dielectric parameters of different originated wastewater, the objective of our work was to measure the dielectric constant during the purification process of municipal wastewater and pre-treatment of meat- and dairy industry wastewater in static and continuously flow operation mode.

Keywords

Wastewater; sludge; dielectric properties; microwave

INTRODUCTION

Degree of hydrolysis is one of the key issues for the whole efficiency of the sludge utilization processes. In hydrolysis the polymeric and insoluble compounds, such as proteins, fats, carbohydrates and their derivatives are decomposed into less molecules, such as amino acids, monosaccharides, alcohols or fatty acids. Due to the complex particle structure, and presence of strong cell membranes, sludge is difficult to directly bio-degrade under aerobic or anaerobic conditions, as well. The main aim of sludge pre-treatment technologies is to disrupt the cell membranes, thus lysis of the cells of microorganisms, and to accelerate the hydrolysis of macromolecular components. Methods for sludge disintegration can be based on mechanical, thermal and chemical processes or their combination.

Among the different sludge handling methods, microwave irradiation is successfully applied in the process of hygienization, dewatering, drying and pre-treatment stage of anaerobic digestion (AD). Pre-treatments by microwave irradiation offers advantages such as rapid and direct heating, reduction of energy loss, better controllability compared to the conventional thermal methods. Higher energetic efficiency of dielectric heating based in the different way of energy transfer than conventional heating. In conventional heating the electric energy is converted into heat, after the heat is transferred to the surface of the material, and the heat penetrates from the surface towards the core of materials. During dielectric heating microwave energy is delivered into the material directly, and heating occurs inside of the materials (volumetric heating) due to the molecular interactions with electromagnetic field (Appleton et al., 2005).

A microwave method is suitable to increase the degree of conversion of organic matters in the sludge flocks into easily accessible compounds for fermentative microorganisms. Disruption of cell membranes led to release of the protoplasm-enzymes responsible for the increasing of ammonia and phosphate concentration in sludge liquor. Considering the efficiency of sludge disintegration and

the biogas production kinetic, microwave pre-treatments has been found to be superior to conventional thermal pre-treatment processes.

The most used method to characterize the change in the efficiency of disintegration is the measure of the soluble to total chemical oxygen demand (SCOD/TCOD) (Tyagi and Lo, 2013). Lysis of microbial cell walls and disintegration of sludge flocks is determined by hydrogen bindings, hydrophobic interactions and also by the concentration of divalent cations. Increment of Ca^{2+} and Mg^{2+} , as a component of phospholipids, is due to the disruption of cell walls (Ahn et al., 2009). Therefore the measurement of divalent ion concentration in liquid phase can be suitable indirect method to follow the degree of disintegration. Furthermore, the strong effect of microwave irradiation on the cell wall disruption and sludge flock disintegration was confirmed by microscope observations (Bohdziewicz et al., 2006), as well.

Results of preliminary studies established that organic matter releasing is mainly influenced by the final temperature and temperature ramp of sample during the process and the duration of microwave irradiation. If the final temperature is higher than 80°C a partial conversion of NH_4^+ into gas phase as NH_3 can be observed, decreasing the organic matter concentration of liquid phase (Eskicioglu et al., 2007). Furthermore, if the temperature of sample reach the boiling point a slight decrease of COD concentration occurred (Bohdziewicz et al., 2011). Because the heat stress is influenced by the temperature ramp which is depended on the strength of electromagnetic field, the power of microwave irradiation can be also determinative process parameter (Beszedes et al., 2011).

Numerous reports concluded that microwave pre-treatment is suitable to enhance the efficiency of anaerobic digestion process, what manifested in higher biogas product and accelerated biogas production rate (Bougrier, 2007). The increment of biogas production and utilization value of biogas (calorific value and quality determined mainly by the methane, carbon dioxide and hydrogen sulfide concentration) is affected by the type of processed sludge.

Thermal and athermal effects of microwave irradiation have been investigated for many years. Athermal effects means a special effect of electromagnetic field at microwave frequency range that is not associated with temperature increasing of irradiated materials. Microwave radiation can polarize the side chains of macromolecules, and a change in dipole orientation of polar molecules can be occurred. High frequency electromagnetic waves induce structural changes and orienting effects within the materials. It can be noticed, that at frequencies of 915 MHz and 2450 MHz, which are commonly used for industrial and scientific applications, the energy of microwave photon is not enough to break hydrogen and covalent bonds, or induce directly chemical reactions (Kappe, 2004). Heat generation efficiency of microwaves is determined by the frequency, concentration, structure and composition of irradiated matrix, particle size, viscosity, individual and integral dielectric properties of compounds, penetration depth etc. Heating mechanisms of microwave irradiation can be attributed by dielectric polarization and ionic conduction. Depend to the applied frequency, dipolar molecules, such as water; move in time with the varying polarity electromagnetic field. During microwave irradiation local charges of dipolar materials tend to move. If dipole lag behind the electromagnetic field energy dissipation is occurred in the material led to heat generation. In wastewater and sludge water (moisture) can be considered as the main component. Dipole movement was influenced by the strength of hydrogen bounded matrix of materials. In the case of the free water content the movement has been revealed at GHz frequency range. Dipolar movement is the dominant mechanism for bound water at MHz frequency ranges, for ice at kHz frequencies (Brodie et al., 2014).

In heterogeneous and complex systems the dielectric properties are determined by the molecular structure of compounds, and the physico-chemical properties, as well. The continuous realignment of polarized dipoles to the varying polarity electromagnetic field can result in collisions of dipolar molecules and weakening of hydrogen bonds within water molecules (Afolabi and Sohail, 2017). Behavior of molecules in the irradiated materials is characterized by the dielectric parameters, such as the complex dielectric permittivity or its real and imaginary component i.e. the dielectric constant and dielectric loss factor. Dielectric loss factor indicates the transmission loss (power dissipation) in material, i.e. the conversion of irradiated microwave energy to heat. Dielectric constant characterized the capacity properties of materials, the ability of the dipolar molecules for polarization at a given frequency.

Because the dielectric parameters are linked to the molecular structure of materials, change in physiochemical structure can be detected by dielectric measurements. On the other hand, because the change of dielectric parameters has effect on heating efficiency of microwaves, structural change in processed materials has a retroaction for the efficacy and economy of microwave heating processes. It has been verified elsewhere, that microwave pre-treatments are suitable for preliminary hydrolysis of macromolecules before anaerobic digestion of sludge, what led to increasing in biogas production. During microwave pre-treatment carbohydrates are hydrolyzed into sugars; proteins into amino acids, or lipids into short-chain fatty acids. With decreasing of molecular weight and increasing of polar characteristic of hydrolyzed monomers, the polarization ability of the processed materials enhanced, therefore these changes can be characterized and quantified by the change of dielectric parameters.

MATERIALS AND METHODS

Municipal wastewater samples were originated from a local wastewater treatment plant, purified wastewater was sampled after biological stage of WWTP. Raw (untreated) food industry wastewater sampled from the puffer tank of wastewater line of a meat processing plant. Main characteristics of samples are summarized in Table 1.

Table 1. Main characteristics of wastewater samples

Parameter	Unit	Municipal wastewater		Meat industry wastewater
		raw	purified	
pH	[-]	7.3 ± 0.3	7.1 ± 0.2	5.9 ± 0.2
TCOD	[mgO ₂ L ⁻¹]	986 ± 34	102 ± 2.1	1697 ± 93
SCOD	[mgO ₂ L ⁻¹]	115 ± 22	68 ± 4.1	323 ± 11.8

Total solid content (TS) of samples was determined by drying cabinet method using temperature of 105°C to achieve constant weight. Organic matter content was measured by COD fractionation method. Soluble chemical oxygen demand (SCOD) was measured using colorimetric method (APHA, 2005) from supernatant of samples after centrifugation (10000 rpm for 15 minutes) and microfiltration (0.45 µm). Total chemical oxygen demand (TCOD) was measured from whole matrix after dilution. Disintegration degree (DD%) was given as the change in the ratio of SCOD to TCOD.

Microwave pre-treatments was carried out in a tailor made microwave unit equipped with variable power magnetron (from 100 W to 700W) operating at 2450 MHz frequency. In continuously flow operation mode, the volumetric flow rate of irradiated samples was varied by the rpm of peristaltic pump in the range of 10-45 Lh⁻¹.

Dielectric constant (ϵ') was determined in a tailor made dielectrometer equipped with a dual channel NRVD power meter (Rohde & Schwarz). Magnetron of dielectrometer operates at a frequency of 2450 MHz. ϵ' was calculated from the reflection coefficient (Γ) phase shift (ϕ) according to the (1) and (2) equations

$$\delta = \arctg\left(\frac{|\Gamma|\sin\phi}{1-|\Gamma|\cos\phi}\right) - \arctg\left(\frac{|\Gamma|\sin\phi}{1+|\Gamma|\cos\phi}\right) \quad (1)$$

$$\epsilon' = \frac{1}{\sqrt{1+\tan^2\delta}} \left(\frac{1+|\Gamma|^2+2|\Gamma|\cos\phi}{1+|\Gamma|^2-2|\Gamma|\cos\phi} \right) \quad (2)$$

Central composite face centered (CCF) experimental design and response surface methodology (RSM) was applied to investigate the effect of variables on target parameters using STATISTICA 13 software.

RESULTS AND DISCUSSION

In the first series of experiments the effect of total solids (TS) and temperature on disintegration degree (DD%) (Figure 1a) and dielectric constant (Figure 1b) were investigated for municipal wastewater sludge. TS content was adjusted by the mixing of wastewater and sludge originated from municipal wastewater produced in sedimentation process at WWTP.

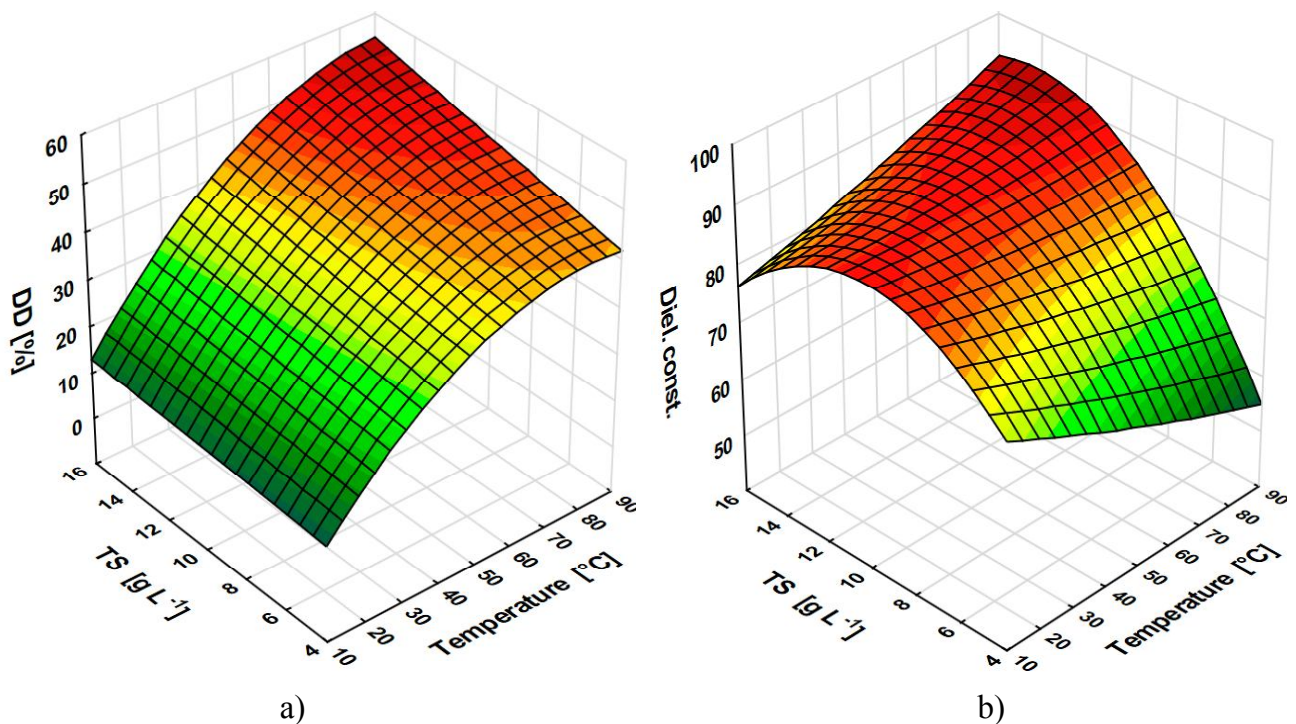


Figure 1. Disintegration degree (a) and dielectric constant as a function of TS and temperature

Figure 1 indicates that disintegration degree was mainly influenced by the pre-treatment temperature. Generally, the increment of temperature cause enhancement of DD, but over a certain value the higher temperature is not resulted in further increasing of DD (Figure1a). Due to the thermal effects the high molecular weight macromolecular components are hydrolyzed, and sludge flock and cell walls start to decompose, what increase the organic matter content in liquid phase indicated by the higher DD (Yang et al., 2013). Structural change, and hydrolysis of macromolecules led to increment of concentration of lower weight and polar components, due to the higher mobility and better polarization ability dielectric constant of pre-treated wastewater and sludge tend to increase, as well. Therefore the disintegration mechanisms are well detectable by dielectric measurement.

Considering the effects of variable TS content, different behaviour of dielectric constant can be found as a function of temperature. With temperature increasing the dielectric constant show decreasing tendency for lower TS contented samples, but increasing tendency was detected for higher solid contented wastewater sludge (Figure1b). Possible explanation for adverse effect of temperature on dielectric constant is the different composition of samples, which determine the dielectric behaviour. In lower TS contented wastewater the ratio of free water to solids is higher; therefore the dielectric behaviour is determined mainly by the relaxation mechanisms of water molecules. At the given frequency (2450 MHz) dielectric constant of water decreased with increasing temperature. If the TS content increase, the dielectric behaviour start to be more influenced by the dipolar relaxation shift of other molecules and ionic conduction of ionic compounds. Because of thermal effects, the hydrolysis of macromolecules and the release of intracellular substances have been occurred (Bohdziewicz et al., 2011). These mechanisms led to increased ratio of free water content to bound water, enhance the mobility and polarization ability of compounds in electromagnetic field led to increased dielectric constant (Brodie et al., 2014).

In order to investigate the relationship between the change of disintegration degree and dielectric parameters continuously flow microwave pre-treatments were carried out for high organic matter contented primary sludge originated from meat processing plant.

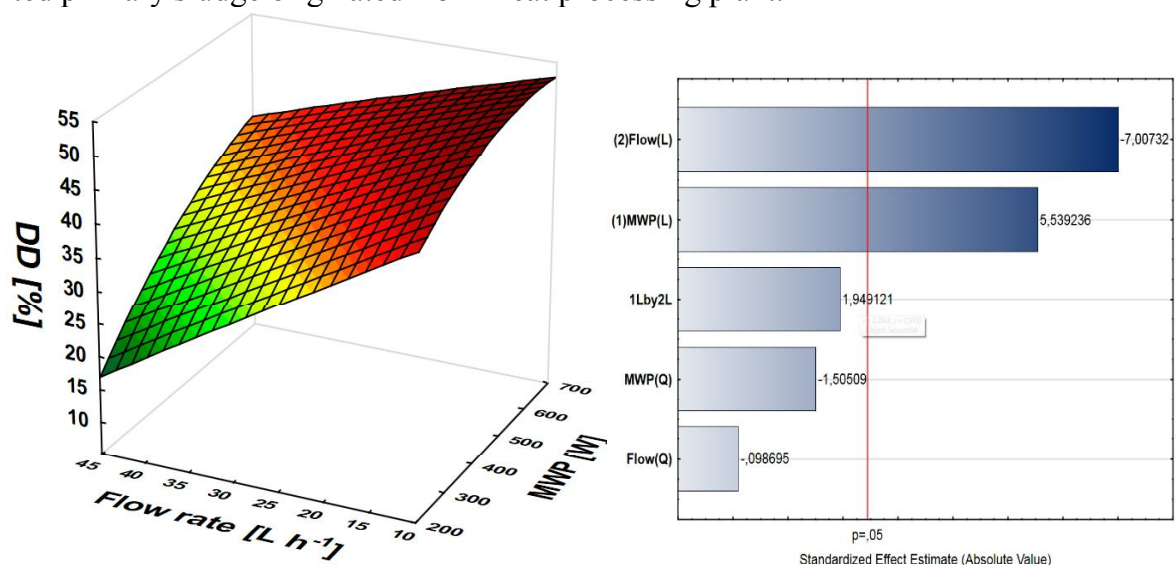


Figure 2. Change of disintegration degree of meat processing sludge during MW pre-treatments

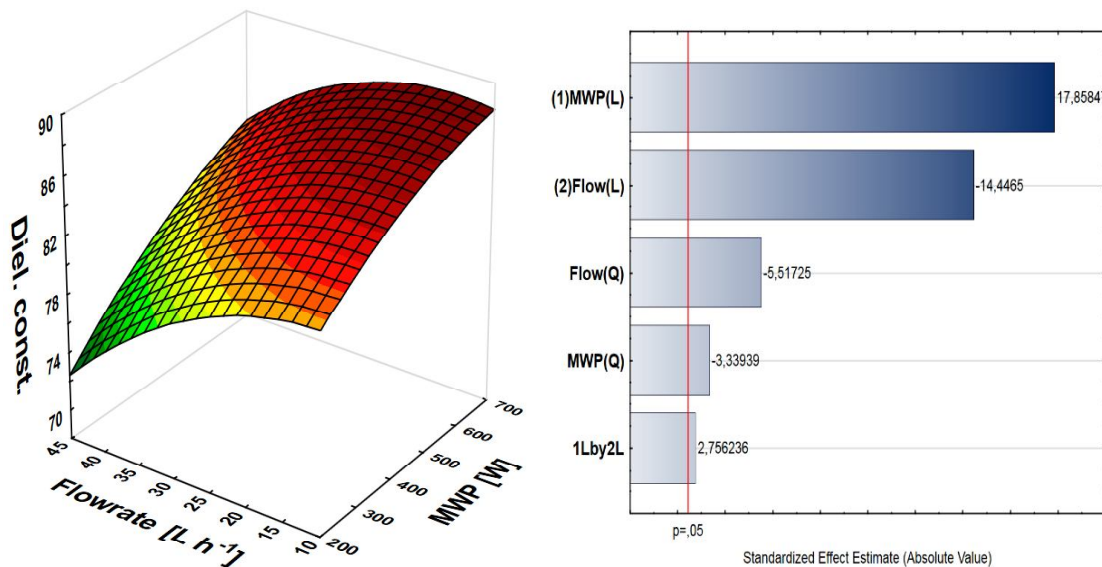


Figure 3. Dielectric constant of MW pre-treated meat processing wastewater (dielectric constant measured after cooling to temperature of 25°C for all samples)

As results show, applying continuously flow microwave pre-treatment the decreasing of volumetric flow rate (what means longer residence time in microwave reactor) and increasing of microwave power led to increased disintegration degree. Pareto chart indicates that the flow rate and microwave power has also significant effect on DD, but interaction of two variables was not significant at 95% level (Figure 3).

Dielectric constant show similar main tendency that was obtained for the DD, varying of dielectric constant indicates the physicochemical change of pre-treated sludge. Results of response surface modelling and ANOVA show that microwave power, flow rate and their interaction has also significant effect on dielectric constant of meat processing effluents, and behaviour of dielectric constant can be described by quadratic regression model. Beside that the examination of dielectric parameters are suitable to detect and quantify the structural change, the change of dielectric constant caused by microwave pre-treatment has also effect on the energetic efficiency of microwave heating.

In order to investigate the suitability of dielectric measurement for detection of changes in wastewater quality parameters, the method was tested using municipal wastewater, as well. Municipal wastewater samples came from the different stage of purification technology of a local WWTP. Figure 4 show the temperature and flow rate dependency of dielectric constant for raw wastewater (a) and for purified wastewater (b). In these experiments the dielectric constant measurements were carried out continuously flow (non static) mode to investigate the effect of flow rate on dielectric parameters and to test the sensitivity of measurement method for sample homogeneity.

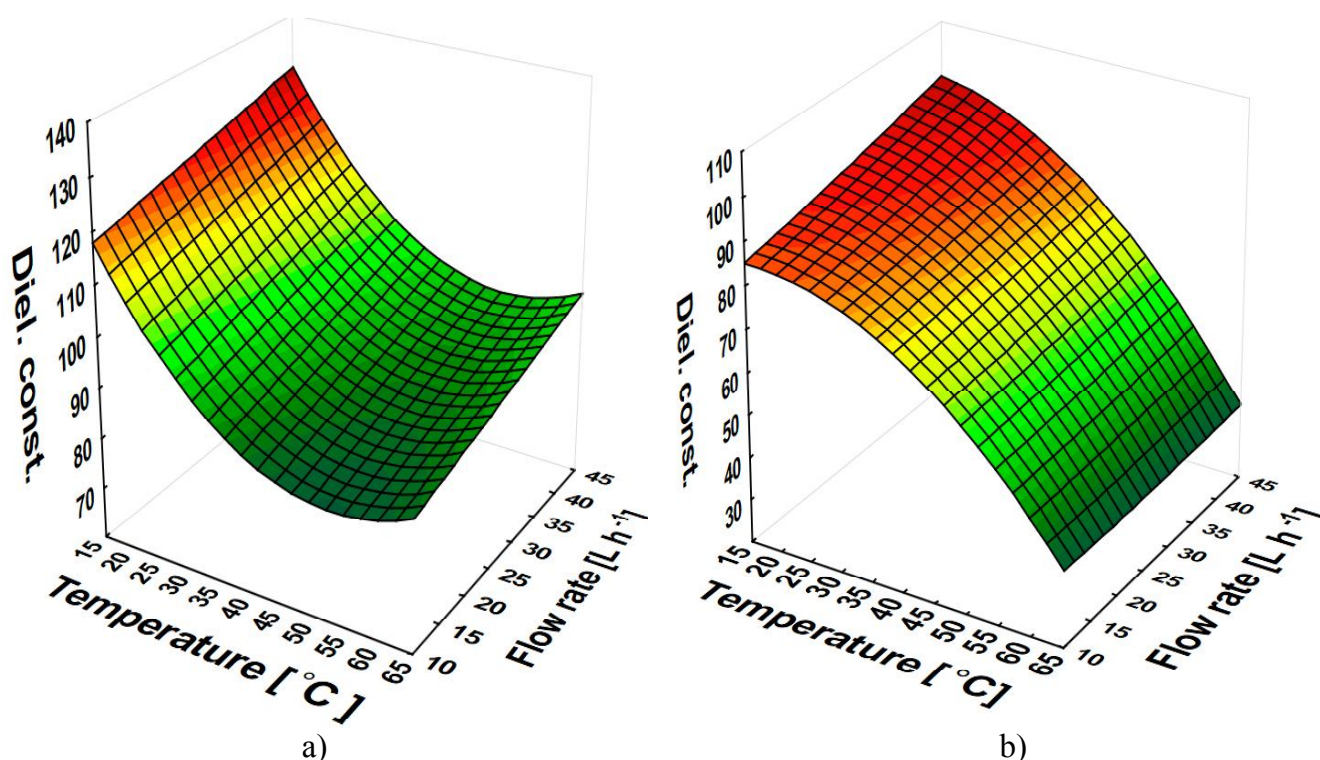


Figure 4. Dielectric constant of raw (a) and purified (b) municipal wastewater

Results indicated that the change of dielectric constant versus volumetric flow rate and temperature was different for raw and purified municipal wastewater (Figure 4). Because of high particulate matter content of raw wastewater, especially at higher temperature range the flow rate has effect on the dielectric constant. Due to the higher temperature, structural changes has been occurred in raw wastewater, and higher velocity assist disruption of cell walls, and because of higher homogeneity enhance the efficiency of hydrolysis of macromolecular components and disintegration of particulates. These effects led to higher value of dielectric constant. Considering the effect of temperature, it can be found a break point (above range of 50-55°). The increment of dielectric constant above a critical temperature range was due to thermal hydrolysis of macromolecular components and release of intracellular substances into the intercellular space. These effects can be more expressed if organic matter content of wastewater is higher (see Figure 1b).

In the case of lower organic matter contented purified water, the effect of flow rate on dielectric constant at a given temperature was slight and non significant, and the temperature dependency had similar tendency that of known for 'pure' water (Holtze et al., 2006). It can be summarized, that the measurement of dielectric constant is suitable method to detect the change in organic matter removal efficiency during a conventional wastewater purification technology.

CONCLUSION

Results of this research on the dielectric constant measurement for investigation of wastewater treatment process and disintegration of particulate organic matters support the finding that dielectric measurements are suitable to detect and quantify the physicochemical changes and organic matter removal during a purification process. Although the main component of wastewater is the water, the dielectric behaviour as a function of temperature or the volumetric flow rate was different that of obtained for pure water. Thermal pre-treatments have effect on disintegration of particulates in municipal and food industry wastewater, and these changes have effect on dielectric constant, as well. Our preliminary results make suitable to develop real time and in-line dielectric measurement methods to detect the disintegration and removal efficiency of wastewater purification process.

Furthermore the change of energetic efficiency during microwave treatments can be controllable by the application of dielectric measurements.

ACKNOWLEDGMENTS:

The authors are grateful for the financial support provided by the OTKA, project number: K115691. This project was supported by the János Bolyai Research Scholarship of the Hungarian Academy of Sciences.

REFERENCES

- Afolabi, O.D., Sohail, M. (2017) Microwaving human faecal sludge as a viable sanitation technology option for treatment and value recovery-a critical review. *Journal of Environmental Management*, **187**, 401-415.
- Ahn, J.H., Shin, S.G., Hwang, S., (2009), Effect of microwave irradiation on the disintegration and acidogenesis of municipal secondary sludge. *Chemical Engineering Journal*, **153**, 145-150
- Appleton, T.J., Colder, R.L., Kingman, S.W., Lowndes, I.S., read, A.G. (2005) Microwave technology for energy-efficient processing of waste. *Applied Energy*, **81**, 85-113.
- Beszédes, S., László, Zs., Szabó, G., Hodúr C. (2011) Effects of Microwave Pretreatments on the Anaerobic Digestion of Food Industrial Sewage Sludge. *Environmental Progress and Sustainable Energy*, **30**, 486-492.
- Bohdziewicz, J., Sroka, E. (2006) Application of hybrid systems to the treatment of meat industry wastewater. *Desalination*, **198**, 33-40.
- Bohdziewicz, J., Kuglarz, M., Grübel, K. (2011) The influence of microwave irradiation on the increase of waste activated sludge biodegradability. *Architecture Civil Engineering Environment*, **4**, 123-130.
- Bougrier, C., Delgenes, J.P., Carrere, H. (2007) Impacts of thermal pretreatments on the semi-continuous anaerobic digestion of waste activated sludge. *Biochemical Engineering Journal*, **34(1)**, 20-27.
- Brodie, G., Destefani, R., Schneider, P.A., Airey, L., Jacob, M.V. (2014) Dielectric properties of sewage biosolids measurement and modeling. *Journal of Microwave Power and Electromagnetic Energy*, **48**, 147-157.
- Holtze, C., Sivaramakrishnam, R., Antionetti, M., Tsuwi, J., Kremer, F., Kramer, K.D. (2006) The microwave absorption of emulsions containing aqueous micro and nanodroplets: a means to optimize microwave heating. *Journal of Colloid and Interface Science*, **302**, 651-657.
- Kappe, C.O. (2004) Controlled microwave heating in modern organic synthesis. *Angewandte Chemie*, **43**, 6250-6284.
- Leonelli, C., Mason, T.J. (2010) Microwave and Ultrasonic Processing: Now a Realistic Option for Industry. *Chemical Engineering and Processing*, **49**, 885-900.
- Tyagi, V.K., Lo, S.L. (2011) Application of physicochemical pretreatment methods to enhance the sludge disintegration and subsequent anaerobic digestion: an up to date review. *Reviews in Environmental Science and Biotechnology*, **10**, 215-242.
- Yang, Q., Yi, J., Luo, K., Jing, X., Li, X., Liu, Y., Zeng, G. (2013) Improving disintegration and acidification of waste activated sludge by combined alkaline and microwave pretreatment. *Process Safety and Environmental Protection*, **91**, 521-526.